

Second Order Linear Homogeneous Differential Equations with Constant Coefficients

Henceforth '*second order homogeneous differential equations*'

Definition. A differential equation of the form

$$\frac{d^2y}{dx^2} + a \frac{dy}{dx} + by = 0 \text{ or } y'' + ay' + by = 0$$

Example

Solve $y' - y = 0$

Method 1:

Method 2:

Example

Solve $y' - cy = 0$

Example

Solve $y'' + 3y' + 2y = 0$

Example

Solve $y'' + 4y' + 5y = 0$

Remark (Why try an exponential?). For a linear DE with constant coefficients, we seek a function whose derivatives are proportional to itself. The exponential $y = e^{\lambda x}$ has this property: $y' = \lambda e^{\lambda x} = \lambda y$ and $y'' = \lambda^2 y$, etc. Substituting into $y'' + ay' + by = 0$ gives

$$\lambda^2 e^{\lambda x} + a\lambda e^{\lambda x} + be^{\lambda x} = 0$$

Since $e^{\lambda x} \neq 0$, we can divide through to get the **auxiliary equation** $\lambda^2 + a\lambda + b = 0$.

Example

Solve $y'' - 4y' + 4y = 0$, such that $x = 0, y = 1, y' = -1$

Fact — To find the solution of the differential equation $y'' + ay' + by = 0$

Step 1: Form the **auxiliary equation** $\lambda^2 + a\lambda + b = 0$

Step 2: Solve the auxiliary equation to find two roots, α, β .

Step 3: If $\alpha \neq \beta$ are both real, then the general solution is

$$y = Ae^{\alpha x} + Be^{\beta x}$$

Step 4: If $\alpha = p + iq = \beta^*$ are complex conjugate roots, then the general solution is

$$y = e^{px}(A \cos qx + B \sin qx)$$

Step 5: If $\alpha = \beta$ is a repeated root then the general solution is

$$y = (A + Bx)e^{\alpha x}$$

Step 6: Apply any *initial* or *boundary* conditions to find the constants and give a **particular solution**

Second Order Linear Non-Homogeneous Differential Equations

Example

Why are these differential equations called **linear**?

Example

Solve $y'' - 3y' + 2y = 4$

Example

Solve $y'' + 6y' + 8y = x$

Example

Solve $y'' - 3y' + 2y = e^x$

Example

Solve $y'' - 4y' + 4 = e^{2x}$

Fact — To find the solution of the differential equation $y'' + ay' + by = f(x)$

Step 1: Use the earlier method to solve the homogeneous equation $y'' + ay' + by = 0$. This will give us our **complementary function**

Step 2: Find a suitable **Ansatz** for our $f(x)$.

$f(x)$	Ansatz
c	some constant
x	$px + q$
$p(x)$	some polynomial of the same degree
e^{mx}	ke^{mx}
$\sin mx / \cos mx$	$p \sin mx + q \cos mx$
$x^k \sin mx$	$p(x) \sin mx + q(x) \cos mx$ where p, q have degree k

If our ansatz is a solution to the differential equation, multiply it by x (and if that's a solution, by x^2 and so on...)

Step 3: Find constants such that the ansatz gives a **particular integral**

Step 4: Add the particular integral to the complementary function to find the **general solution**

Step 5: Apply any *initial* or *boundary* conditions to find the constants and give a **particular solution**

Simple Harmonic Motion (SHM)

Example

A particle, of mass 5 kg, is held on a smooth surface, 0.3 m from a fixed point P , which it is attached to by a spring of natural length 0.2 m and modulus of elasticity 40 N. Describe the motion of the particle once it is released.



Fact — Simple Harmonic Motion is modelled by $\ddot{x} = -\omega^2 x$.
Solutions will take the form

$$x(t) = A \sin(\omega t) + B \cos(\omega t) = R \sin(\omega t + \phi)$$

Definition. $\omega = 2\pi f$ is the **angular frequency**

Definition. $T = \frac{2\pi}{\omega} = \frac{1}{f}$ is the **period** (the time it takes to repeat one cycle).

Definition. R is the **amplitude** of the motion. (The maximum displacement from the **equilibrium position**)

Definition. ϕ is the **phase** of the motion

Fact (Energy in SHM) — For a particle of mass m undergoing SHM with $x = R \sin(\omega t + \phi)$:

Kinetic energy:	$KE = \frac{1}{2} m \dot{x}^2 = \frac{1}{2} m \omega^2 R^2 \cos^2(\omega t + \phi)$
Potential energy:	$PE = \frac{1}{2} m \omega^2 x^2 = \frac{1}{2} m \omega^2 R^2 \sin^2(\omega t + \phi)$
Total energy:	$E = KE + PE = \frac{1}{2} m \omega^2 R^2 = \text{constant}$

Energy oscillates between kinetic and potential, but total mechanical energy is conserved. Maximum speed $v_{\max} = \omega R$ occurs at $x = 0$; maximum displacement $x = \pm R$ occurs when $v = 0$.

Example

For SHM in harmonic form, what is the initial displacement? What is the initial speed?

Example

A spring of natural length 10 cm is attached to a hook in the ceiling. A particle of mass 0.5 kg is attached to the other end of the spring. When the extension of the spring from its natural length is x m the tension in the spring has magnitude $100x$ N.

Use $g = 10\text{ms}^{-2}$, giving your final answers to an appropriate degree of accuracy.

- (a) Show that, in the equilibrium position, the length of the spring is 15 cm.
- (b) Show that, if the spring is displaced from the equilibrium, the particle will perform simple harmonic motion and find the time period of oscillations about this equilibrium
- (c) The spring is stretch 2 cm from the equilibrium position and then released. Find the maximum speed of the particle.

Damped Harmonic Motion


Example

A bob of mass 0.1 kg is connected to a spring. In air, the bob is found to follow SHM with period π seconds. The bob is then placed into oil where there is a drag force of magnitude $0.2v$. Find the motion of the bob.

Fact — If we have an object which would undergo SHM, but for a drag force, we can model it as following a differential equation:

$$\ddot{x} + k\dot{x} + \omega^2 x = 0$$

We know from our earlier studies of differential equations that we can solve this differential equation. Looking at the discriminant, $\Delta = k^2 - 4\omega^2$ of the auxiliary equation, we find that:

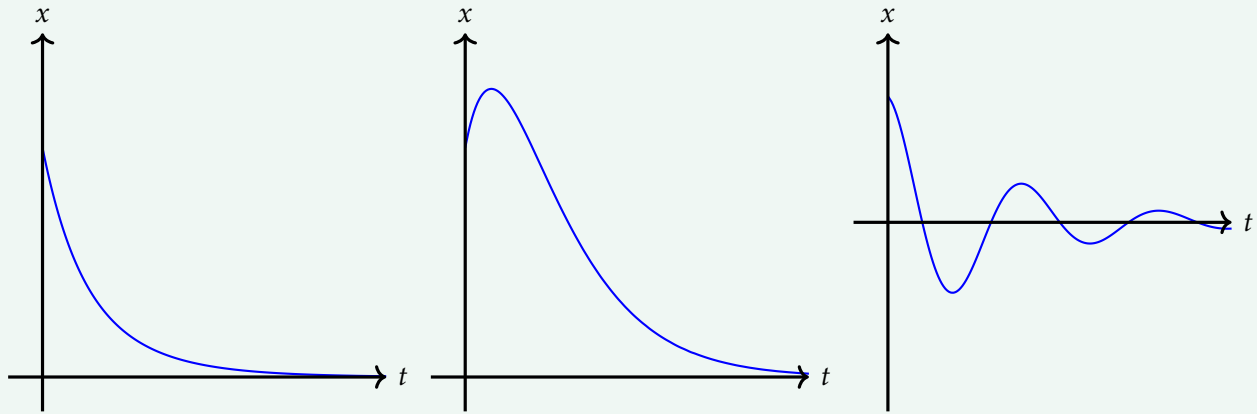

$$k^2 - 4\omega^2 > 0$$

Overdamping

$$x = Ae^{\alpha t} + Be^{\beta t}$$

$$k^2 - 4\omega^2 = 0$$

Critical damping

$$x = (A + Bt)e^{-\frac{k}{2}t}$$

$$k^2 - 4\omega^2 < 0$$

Underdamping

$$x = (A \sin qt + B \cos qt)e^{-\frac{k}{2}t}$$

Example (OCR November 2021 - Pure Core 1 Q11)

The displacement of a door from its equilibrium (closed) position is measured by the angle, θ radians, which the door makes with its closed position. The door can swing either side of the equilibrium position so that θ can take positive and negative values. The door is released from rest from an open position at time $t = 0$.

A proposed differential equation to model the motion of the door for $t \geq 0$ is

$$\frac{d^2\theta}{dt^2} + \lambda \frac{d\theta}{dt} + 3\theta = 0 \text{ where } \lambda \text{ is a constant and } \lambda \geq 0.$$

- (a) (i) According to the model, for what value of λ will the motion of the door be simple harmonic? [1]
- (ii) Explain briefly why modelling the motion of the door as simple harmonic is unlikely to be realistic. [1]
- (b) Find the range of values of λ for which the model predicts that the door will never pass through the equilibrium position. [2]
- (c) Sketch a possible graph of θ against t when λ lies **outside** the range found in part (b) but the motion is not simple harmonic. [1]

Forced/Driven Harmonic Motion**Example**

A particle P of mass 1.5 kg is moving on the x -axis. At time t the displacement of P from the origin O is x metres and the speed of P is $v \text{ ms}^{-1}$. Three forces act on P , namely a restoring force of magnitude $7.5x \text{ N}$, a resistance to the motion of P of magnitude $6v \text{ N}$ and a force of magnitude $12 \sin t \text{ N}$ acting in the direction OP . When $t = 0$, $x = 5$ and $\frac{dx}{dt} = 2$.

- (a) Show that $\frac{d^2x}{dt^2} + 4\frac{dx}{dt} + 5x = 8 \sin t$.
- (b) Find x as a function of t .
- (c) Describe the motion when t is large.

Example

A particle P of mass m is attached to one end of a light elastic string AB of natural length l and modulus of elasticity mk^2l . Initially the particle and the string lie at rest on a smooth horizontal plane with $AB = l$. At time $t = 0$ the end B of the spring is set in motion and moves at a constant speed U in the direction AB . The air resistance acting on P has magnitude $2mkv$, where v is the speed of P . At time t the extension of the spring is x and the displacement of P from its initial position is y . Show that, while the string is taut

(a) $x + y = Ut$

(b) $\frac{d^2x}{dt^2} + 2k\frac{dx}{dt} + k^2x = 2kU$.

(c) Find an expression for x in terms of U , k and t .

Linear systems

Example

A sack containing a liquid chemical is placed in a tank. The chemical seeps out of the sack at a rate of $0.1x$ litres per hour, where x is the number of litres of the chemical remaining in the sack after t hours. The chemical in the tank evaporates at a rate $0.2y$ litres per hour, where y is the number of litres of the chemical in the tank after t hours. If the sack originally contained 50 litres of the chemical, find differential equations for x and for y , and solve them. Find the greatest amount of chemical in the tank, and when this occurs.

Example

In a population of foxes (f thousands) and rabbits (r thousands), the foxes have a birth rate $3r$ and a death rate $6f$. The rabbits have a birth rate of $4r$ and a death rate of $8f$.

- (a) Write this information in the form of a pair of differential equations.
- (b) Rewrite these differential equations as a second order differential equation for f .
- (c) Solve this second order differential equation given that initially $f = 2$ and $\frac{df}{dt} = 2$.
- (d) Hence find the solution for r , given that the initial population of rabbits is five thousand.
- (e) What is the long-term population of foxes and rabbits?